Square Series

GWST 209PPB32

Square Series

Disc Harrow

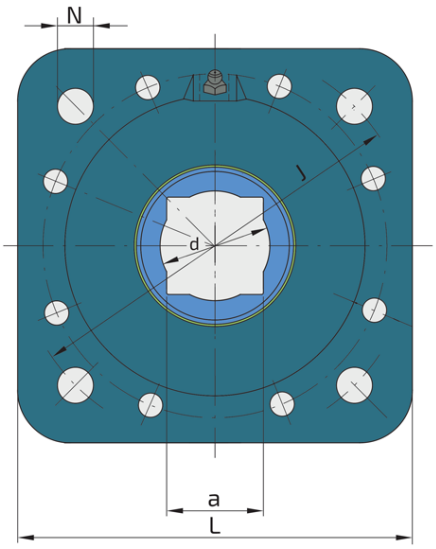

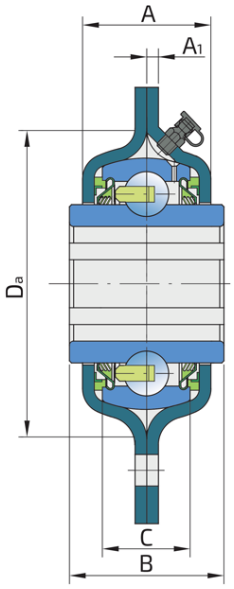

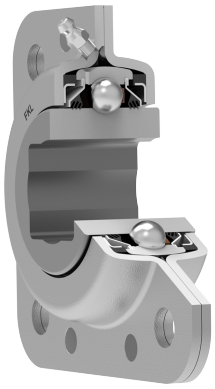

Technical Specification

a	Hexagonal bore	30	mm
d	Bore diameter	1.2598	inch
d	Bore diameter	32	mm
B	Width inner ring	45	mm
C	Width outer ring	22	mm
Da	Centering diameter	97	mm
L	Overall length	127	mm
A	Distance from the housing flange to the front of the inner ring of the bearing	39	mm
A1	Width of the top of the housing	3.5	mm
J	Pitch circle diameter	127	mm
N	Diameter of attachment slot	13.5	mm
Fr	Radial load	7.7	kN
Fa	Axial load	3.8	kN
kg	Mass	1.77	kg
Cdyn	Dynamic load rating	32.5	kN
Co	Static load rating	20.4	kN
Pu	Fatigue load limit	0.857	kN

Sealing

RUBBER PLUG + T SEAL / T SEAL + RUBBER PLUG



3-lip seal seal on both sides provide long lasting protection of the bearing against the penetration of contaminants. Rubber plugs are protecting the area between the bearing and sheet metal housing.