


Y-Ball Bearings With Extended Standard Inner Ring

LS 205 2T

Y-Ball Bearings With Extended Standard Inner Ring

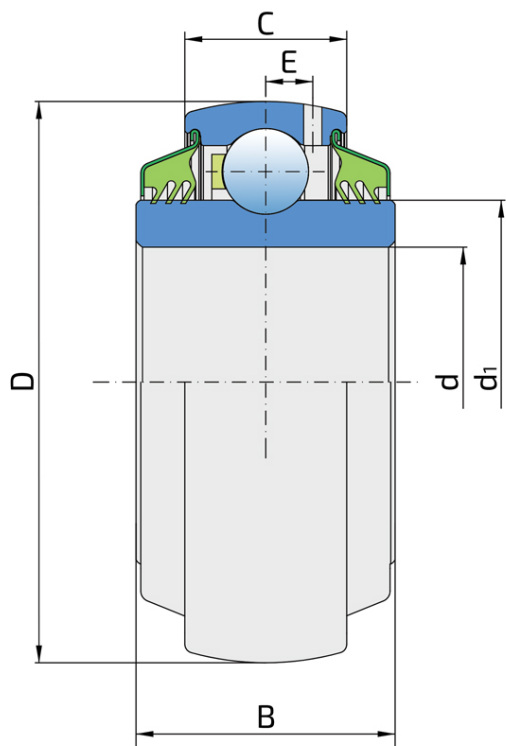

Technical Specification

| | | |
|------------------|--|----------|
| d | Bore diameter | 25 mm |
| D | Outside diameter | 52 mm |
| B | Width inner ring | 24 mm |
| C | Width outer ring | 15 mm |
| d1 | Outer diameter inner ring | 33.6 mm |
| E | Distance from raceway centre to the hole for lubrication | 4.3 mm |
| C _{dyn} | Dynamic load rating | 14 kN |
| C _o | Static load rating | 7.8 kN |
| P _u | Fatigue load limit | 0.335 kN |
| kg | Mass | 0.14 kg |

Sealing

T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

