
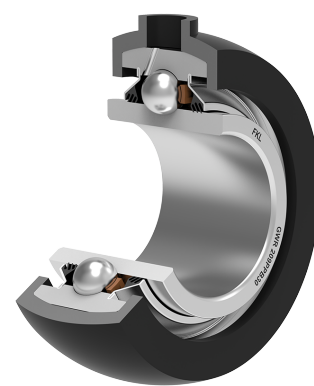


Rubberized Bearing Unit

GWR 209PPB30

Rubberized Bearing Unit
Disc Harrow

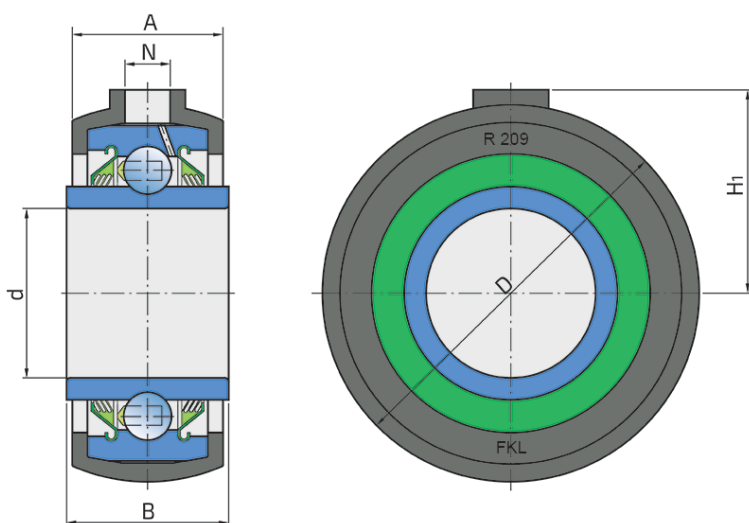

Technical Specification

d	Bore diameter	44.958 mm
d	Bore diameter	1.77 inch
D	Outside diameter	101 mm
A	Housing width	40 mm
B	Width inner ring	42.86 mm
B	Width inner ring	1.687 inch
H1	Distance from the contact surface to the bearing axis	54 mm
N	Hole diameter	12.7 mm
C _{dyn}	Dynamic load rating	32.5 kN
C _o	Static load rating	20.4 kN
kg	Mass	0.92 kg
P _u	Fatigue load limit	0.857 kN

Sealing

T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

