
Rubberized Bearing Unit


GWR 209PPB30

Rubberized Bearing Unit

Disc Harrow



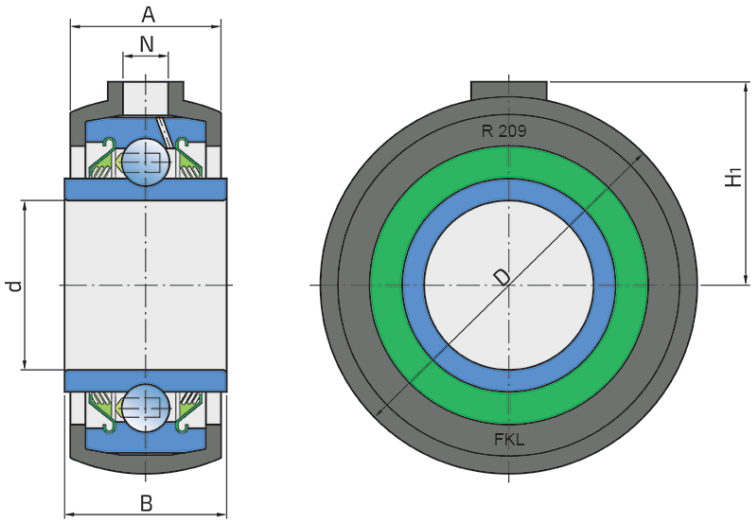

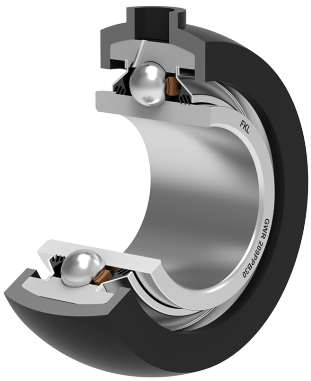


Technical Specification

d	Bore diameter	44.958	mm
d	Bore diameter	1.77	inch
D	Outside diameter	101	mm
A	Housing width	40	mm
B	Width inner ring	42.86	mm
B	Width inner ring	1.687	inch
H1	Distance from the contact surface to the bearing axis	54	mm
N	Hole diameter	12.7	mm
Cdyn	Dynamic load rating	32.5	kN
Co	Static load rating	20.4	kN
kg	Mass	0.92	kg
Pu	Fatigue load limit	0.857	kN

Sealing

T SEAL / T SEAL (2T)



3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on
the both side.