
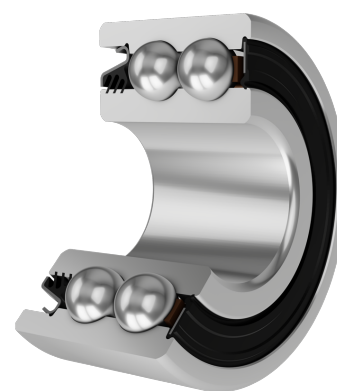


# Double Row Angular Contact Ball Bearings

## SL 3204 TRS

Double Row Angular Contact Ball Bearings  
High-speed planter, precision seed drill

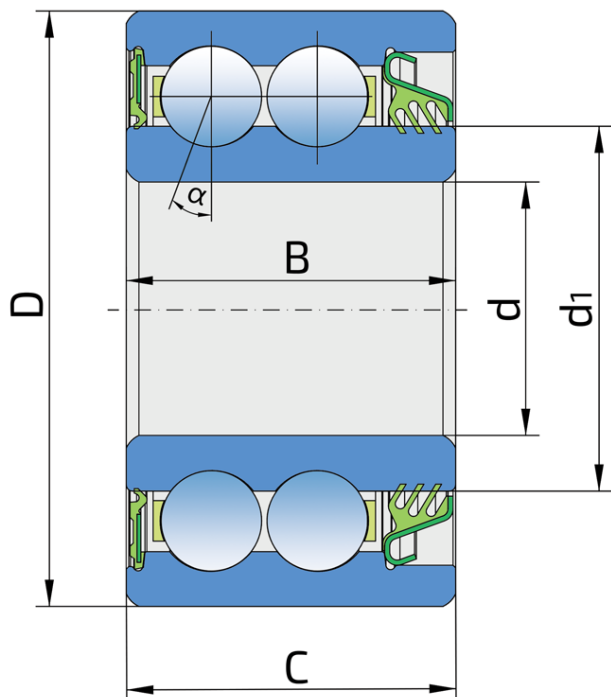

### Technical Specification

d	Bore diameter	20 mm
d1	Inner ring outside diameter	28.8 mm
D	Outside diameter	47 mm
C	Width outer ring	26 mm
B	Width inner ring	26 mm
$\alpha$	Contact angle	25 °
kg	Mass	0.196 kg
C <sub>dyn</sub>	Dynamic load rating	18.8 kN
C <sub>o</sub>	Static load rating	12.6 kN
P <sub>u</sub>	Fatigue load limit	0.529 kN

## Sealing

---

### RS SEAL / T SEAL

RS seal on the base side and 3-lip seal on the front side which is exposed to contaminants.

The 3-lip seal on the front side protects the bearing from contaminant penetration.

&nbsp;

