
Rubberized Bearing Unit

GWR 211PPB21

Rubberized Bearing Unit

Disc Harrow



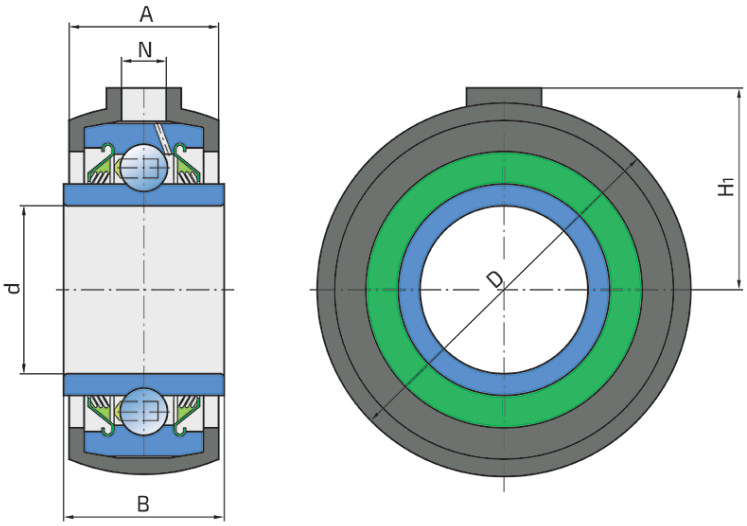




Technical Specification

d	Bore diameter	45.212	mm
d	Bore diameter	1.78	inch
D	Outside diameter	113	mm
A	Housing width	44.7	mm
B	Width inner ring	53.975	mm
B	Width inner ring	2.125	inch
H1	Distance from the contact surface to the bearing axis	60.5	mm
N	Hole diameter	12.7	mm
kg	Mass	1.62	kg
Cdyn	Dynamic load rating	43.5	kN
Co	Static load rating	29	kN
Pu	Fatigue load limit	1.218	kN

Sealing

T SEAL / T SEAL (2T)



3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on
the both side.