
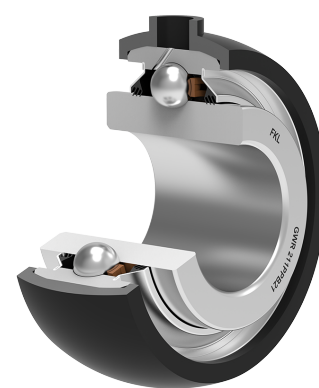


# Rubberized Bearing Unit

## GWR 211PPB21

Rubberized Bearing Unit  
Disc Harrow

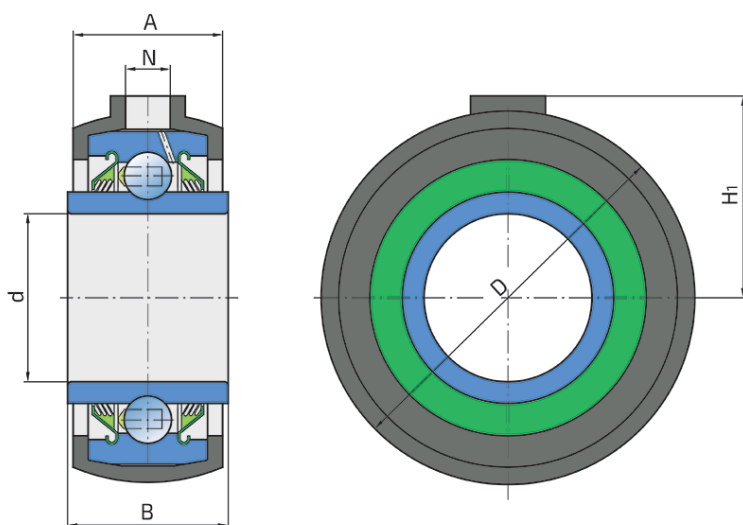

### Technical Specification

d	Bore diameter	45.212 mm
d	Bore diameter	1.78 inch
D	Outside diameter	113 mm
A	Housing width	44.7 mm
B	Width inner ring	53.975 mm
B	Width inner ring	2.125 inch
H1	Distance from the contact surface to the bearing axis	60.5 mm
N	Hole diameter	12.7 mm
kg	Mass	1.62 kg
Cdyn	Dynamic load rating	43.5 kN
Co	Static load rating	29 kN
Pu	Fatigue load limit	1.218 kN

## Sealing

---

### T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

