


Double Row Angular Contact Ball Bearing

5206 KPP3

Double Row Angular Contact Ball Bearing
Seeding Machine

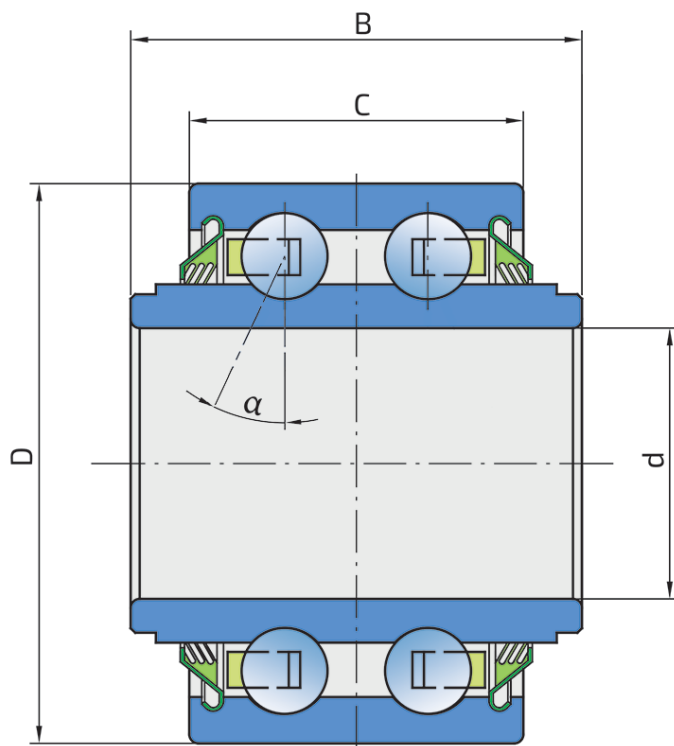

Technical Specification

d	Bore diameter	30.15 mm
D	Outside diameter	62 mm
B	Width inner ring	50 mm
C	Width outer ring	37 mm
α	Contact angle	20 °
kg	Mass	0.5 kg
C _{dyn}	Dynamic load rating	28.7 kN
C _o	Static load rating	21.8 kN
P _u	Fatigue load limit	0.9156 kN

Sealing

T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

