


Armor Bearing Unit

LEFG 207-106 TDT

Armor Bearing Unit

Universal Solution

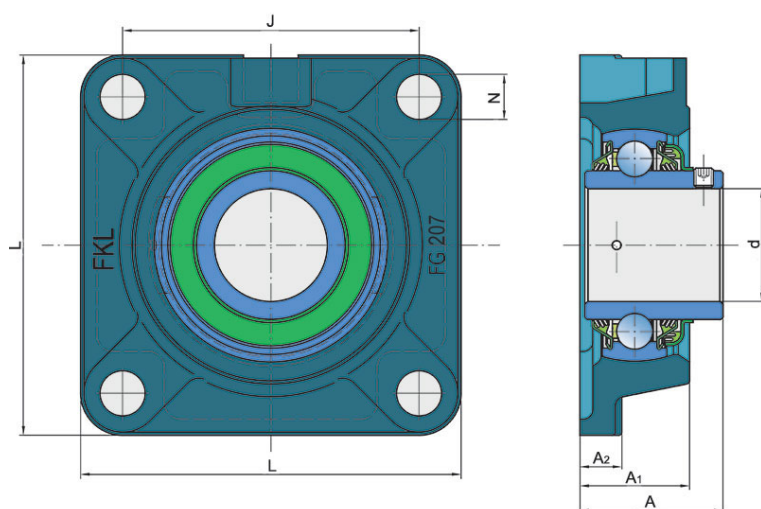

Technical Specification

| | | |
|------|----------------------------|------------|
| d | Bore diameter | 34.925 mm |
| d | Bore diameter | 1 3/8 inch |
| A1 | Total housing width | 34 mm |
| A2 | Housing flange thickness | 13 mm |
| J | Distance between the holes | 92 mm |
| L | Total length | 118 mm |
| N | Hole diameter | 14 mm |
| A | Overall width | 44.4 mm |
| kg | Mass | 1.6 kg |
| Cdyn | Dynamic load rating | 25.5 kN |
| Co | Static load rating | 15.3 kN |
| Pu | Fatigue load limit | 0.643 kN |

Sealing

DOUBLE T SEAL / T SEAL

3-lip seal on the base side and double 3-lip seal on the front side which is exposed to contaminants.

The double 3-lip seal on the front side protects the bearing from contaminant penetration. Also, the outer seal with 3 lips, with additional sealing, protects the inner seal from mechanical damage.

