
Bearing Unit (Double row angular contact ball bearing in pressed steel housing)

PL-7516-SM

Bearing Unit (Double row angular contact ball bearing in pressed steel housing)

Seeding Machine



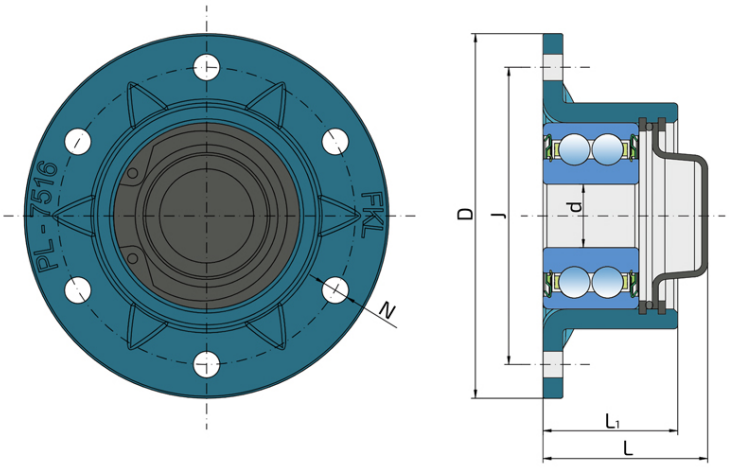


Technical Specification

d	Bore diameter	16	mm
D	Outside diameter	92	mm
J	Pitch circle diameter	75	mm
L1	Total flange length	34	mm
L	Total length	41.55	mm
N	Hole diameter	6.7	mm
kg	Mass	0.54	kg
Cdyn	Dynamic load rating	16.5	kN
Co	Static load rating	11	kN
Pu	Fatigue load limit	0.462	kN

Sealing

S SEAL / S SEAL + O-RING + METAL CAP



S seal on the base side and S seal, O-ring and Metal cap on the front side which is exposed to the environment.
Metal cap protects the nut and reduces the penetration of contaminants.
