
Double Row Angular Contact Ball Bearing

SL 5204/20-2T

Double Row Angular Contact Ball Bearing

Seeder



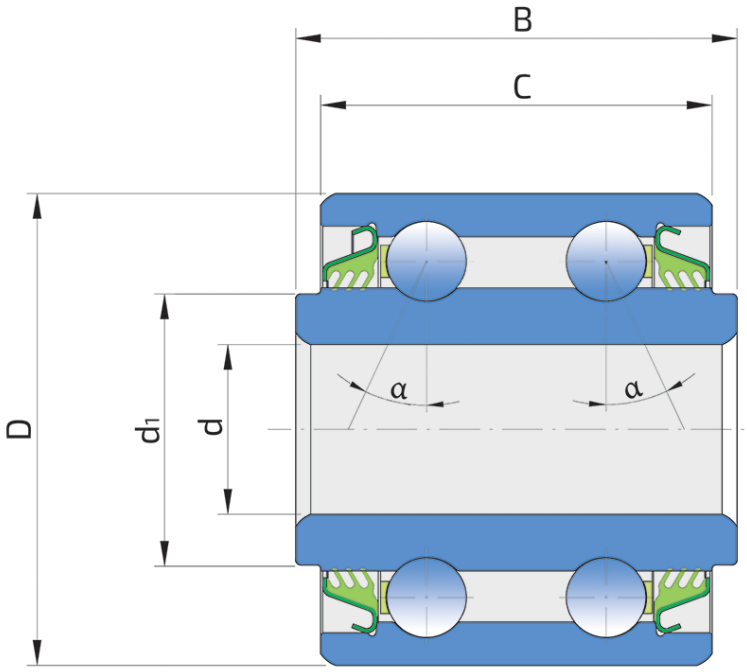




Technical Specification

d	Bore diameter	20	mm
d1	Inner ring outside diameter	27	mm
D	Outside diameter	47	mm
B	Width inner ring	44	mm
C	Width outer ring	39	mm
α	Contact angle	25	°
kg	Mass	0.29	kg
Cdyn	Dynamic load rating	18.8	kN
Co	Static load rating	12.6	kN
Pu	Fatigue load limit	0.529	kN

Sealing

T SEAL / T SEAL (2T)



3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on
the both side.