


# Four Point Contact Ball Bearing

## SL 5316 2T

Four Point Contact Ball Bearing  
Seeding Machine

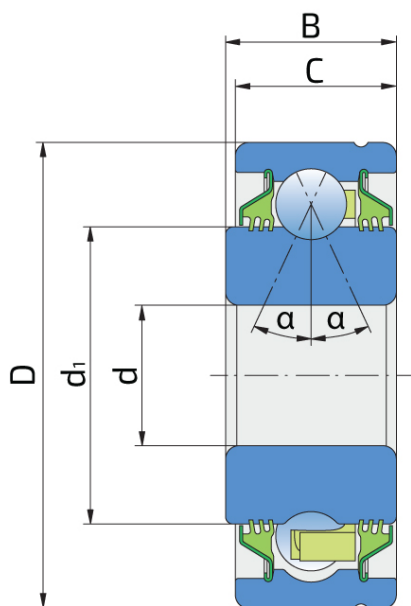

### Technical Specification

d	Bore diameter	16 mm
d1	Outer diameter inner ring	33.74 mm
D	Outside diameter	53.086 mm
B	Width inner ring	19.4 mm
C	Width outer ring	18.288 mm
$\alpha$	Contact angle	25 °
kg	Mass	0.21 kg
C <sub>dyn</sub>	Dynamic load rating	14.02 kN
C <sub>o</sub>	Static load rating	7.85 kN
P <sub>u</sub>	Fatigue load limit	0.33 kN

## Sealing

---

### T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

