
# Four Point Contact Ball Bearing

## SL 5316 2T

Four Point Contact Ball Bearing

Seeding Machine



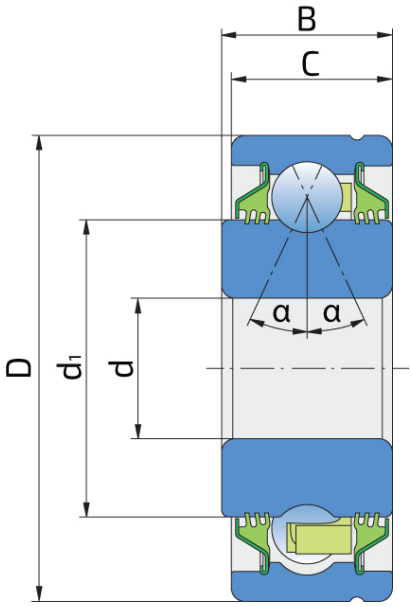




### Technical Specification

| | | | |
|---|---|---|---|
| d | Bore diameter | 16 | mm |
| d1 | Outer diameter inner ring | 33.74 | mm |
| D | Outside diameter | 53.086 | mm |
| B | Width inner ring | 19.4 | mm |
| C | Width outer ring | 18.288 | mm |
| α | Contact angle | 25 | ° |
| kg | Mass | 0.21 | kg |
| Cdyn | Dynamic load rating | 14.02 | kN |
| Co | Static load rating | 7.85 | kN |
| Pu | Fatigue load limit | 0.33 | kN |

## Sealing

### T SEAL / T SEAL (2T)



3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on
the both side.