
Four Point Contact Ball Bearing

SLE 47-16S-2RS

Four Point Contact Ball Bearing

Seeding Machine



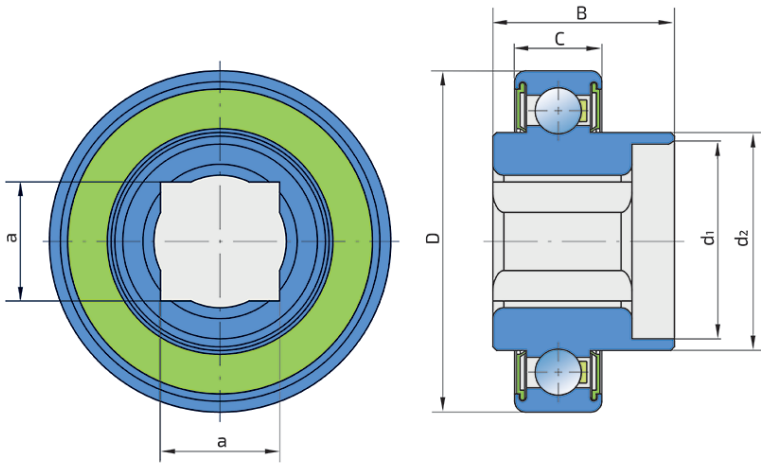




Technical Specification

a	Shaft size	16.4	mm
a	Shaft size	0.65	inch
d	Bore diameter	18.25	mm
d	Bore diameter	0.718	inch
d1	The inside diameter of the collar of the inner ring	26.8	mm
d2	Outer diameter inner ring	30	mm
D	Outside diameter	47	mm
B	Width inner ring	25	mm
C	Width outer ring	12	mm
kg	Mass	0.11	kg
Cdyn	Dynamic load rating	10.5	kN
Co	Static load rating	6.1	kN
Pu	Fatigue load limit	0.256	kN

Sealing

RS SEAL / RS SEAL (2RS)



The older type of the single seal. Prevents penetration of soil, dust and water and since exposed to the impact of abrasive particles is expendable more than some new types of seals. Due to extended friction, the permitted speeds are lower. It was gradually replaced with the improved versions of S. Because of the traditional reasons Y bearings with this kind of seal do not have the additional sealing mark. It is used with the Y-bearings and deep groove ball bearings.