


Ball bearing

LSQ 308 2TD.H.T

Ball bearing

Packer Roller

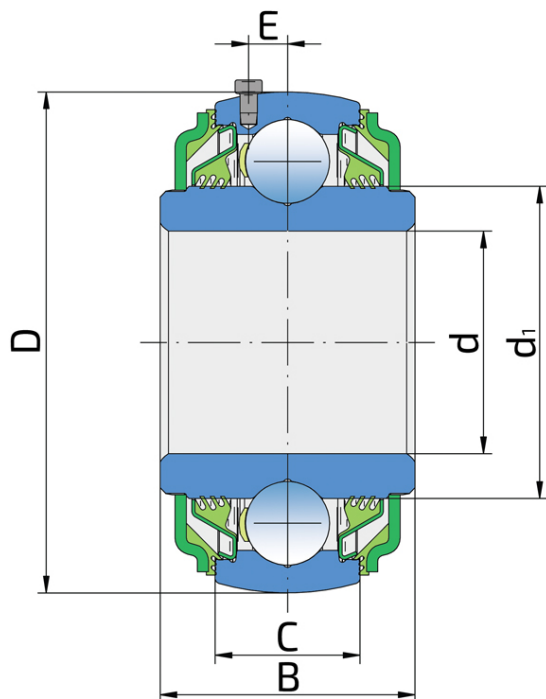

Technical Specification

d	Bore diameter	40 mm
D	Outside diameter	90 mm
B	Width inner ring	45.8 mm
C	Width outer ring	26 mm
d1	Outer diameter inner ring	56.11 mm
E	Distance from raceway centre to the hole for lubrication	7 mm
kg	Mass	0.967 kg
Cdyn	Dynamic load rating	62.3 kN
Co	Static load rating	45.2 kN
Pu	Fatigue load limit	1.898 kN

Sealing

RUBBERIZED FLINGER + T SEAL / T SEAL + RUBBERIZED FLINGER

Rubberized flinger with 3-lip seal on the base side and 3-lip seal with rubberized flinger on the front side which is exposed to contaminants. The 3-lip seal protects the bearing from contaminant penetration. The rubberized flinger protects the seal from mechanical damage and provides additional sealing.

