
# Ball Bearing

## SL 5203.B-2TQ

Ball Bearing

Seeding Machine

COMING SOON...

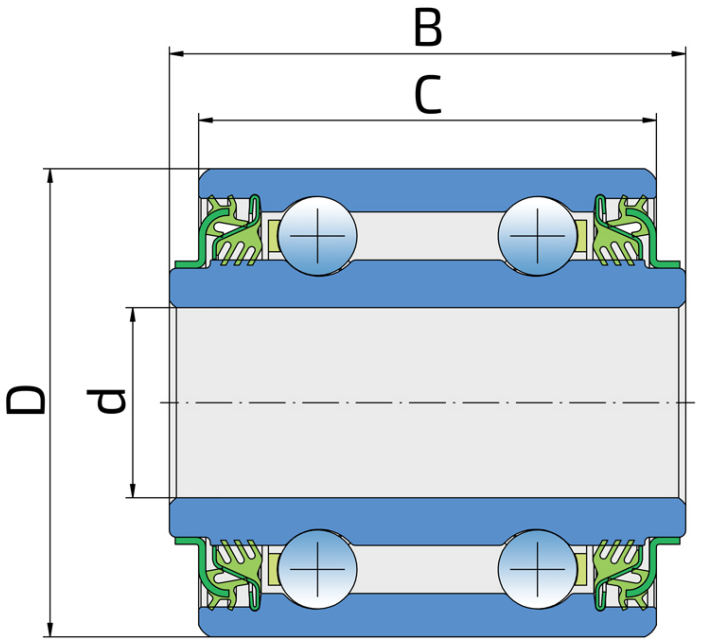


### Technical Specification

| | | | |
|---|---|---|---|
| D | Outside diameter | 40 | mm |
| d | Bore diameter | 16.256 | mm |
| B | Width inner ring | 44.12 | mm |
| C | Width outer ring | 39.12 | mm |
| kg | Mass | 0.218 | kg |
| Cdyn | Dynamic load rating | 14.21 | kN |
| Co | Static load rating | 8.8 | kN |
| Pu | Fatigue load limit | 0.37 | kN |

## Sealing

### TQ SEAL / TQ SEAL (2TQ)

The 2TQ bearing seal (7-lip seal on both sides) is a high-performance contact sealing solution designed to protect bearings from contamination while retaining lubricant inside the bearing.Its design features seven sealing lips on each side, creating a multi-stage barrier against dust, moisture, dirt, and other external contaminants. This advanced sealing system significantly enhances bearing reliability and performance in demanding operating conditions.

