


# Ball bearing

## SL 5203 TS

Ball bearing  
Seeding Machine

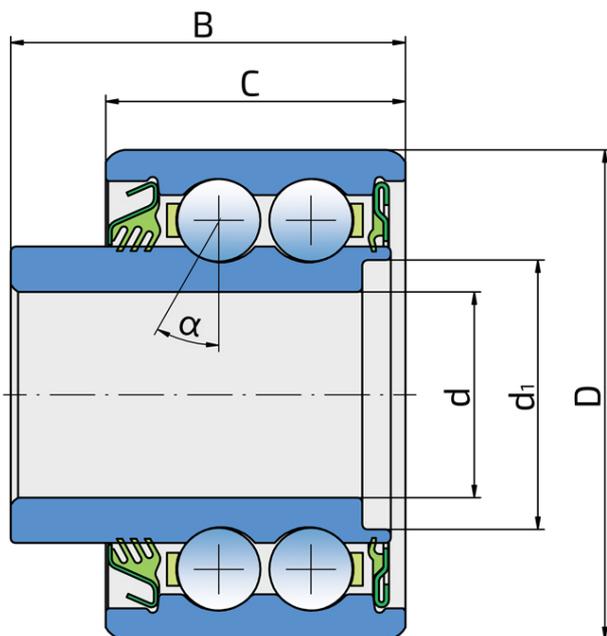

### Technical Specification

d	Bore diameter	16.8 mm
d1	Bore diameter	22 mm
D	Outside diameter	40 mm
B	Width inner ring	32 mm
C	Width outer ring	24.3 mm
$\alpha$	Contact angle	30 °
kg	Mass	0.14 kg
C <sub>dyn</sub>	Dynamic load rating	14.21 kN
C <sub>o</sub>	Static load rating	8.8 kN
P <sub>u</sub>	Fatigue load limit	0.3696 kN

## Sealing

---

### T SEAL / S SEAL

S seal on the base side and the 3-lip seal on the front side.

3-lip seal on the front side ensuring effective protection against contamination. S seal on the base side, preventing ingress of contaminants into the bearing.

