


Integrated Flange, Maintenance-Free Bearing For Independent Discs

IL50-120/4H-M22x1.5

Integrated Flange, Maintenance-Free Bearing For Independent Discs

Disc Harrow

COMING SOON...

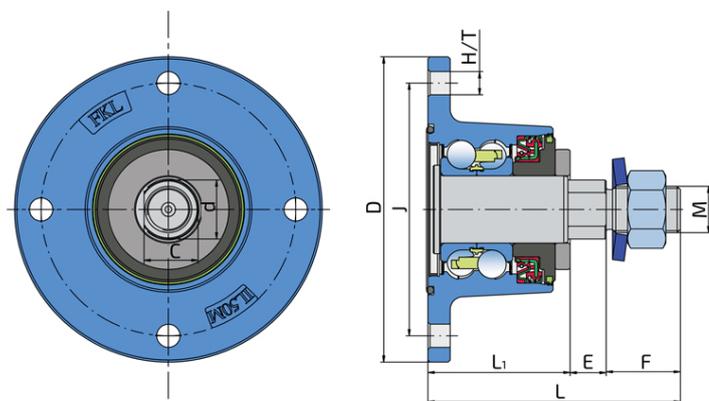

Technical Specification

J	Pitch circle diameter	120 mm
D	Outside diameter	145 mm
H/T	Hole/Thread	4x11 mm
d	Shaft diameter	28 mm
C	D-shape hole cut out dimension	25.5 mm
M	Outer Thread	M22x1.5 mm
L	Total length	119 mm
L1	Total flange length	67 mm
E	Length of D shape	17 mm
F	Length of threaded part	35 mm
kg	Mass	3.25 kg
C _{dyn}	Dynamic load rating	60 kN
C _o	Static load rating	45.8 kN
P _u	Fatigue load limit	1.924 kN

Sealing

O-RING + SHEET METAL SHIELD + RS SEAL / RS SEAL + DIRTBLOCK SEAL + DOUBLE SEAL + FORGED COVER PLATE

O-ring, Sheet metal shield and RS seal on the base side and RS seal, Dirtblock seal, Double seal and Forged cover plate on the front side which is exposed to contaminants. O-ring, Sheet metal shield and RS seal together with attached special disc eliminates the possibility of contamination from the base side. Dirtblock seal is designed for hard working conditions at unfriendly environment. Half metal – half rubber outside diameter provides reliable seal retention in the bore and improves sealing performance. Inside diameter is covered by rubber and improves sealing performance and easy installation. Forged cover plate is additional, strong protection of the Dirtblock seal against mechanical damage. Additional double seal protects the bearing from contaminant penetration and ensures a longer service life of the bearing.

