
The Bearing Solution For Harsh Seeding Conditions And Coulter Discs Of Ploughs, Integrated Flange


IL30-98/4T-B30

The Bearing Solution For Harsh Seeding Conditions And Coulter Discs Of Ploughs, Integrated Flange

Seeding machines for No-till and Strip-till farming technology; Coulter discs for seeding machines; Marker discs for ploughs



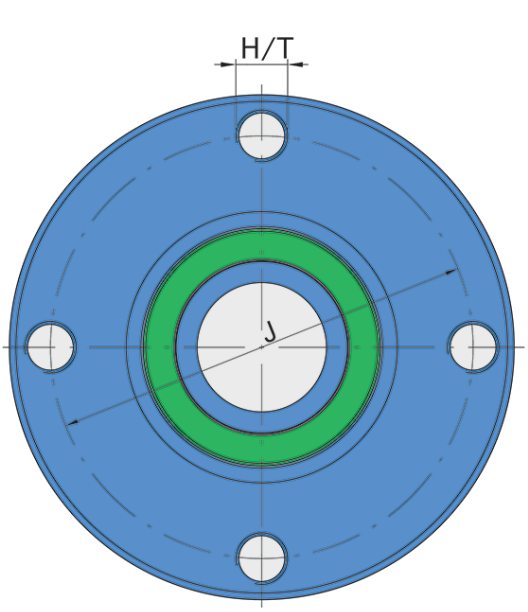

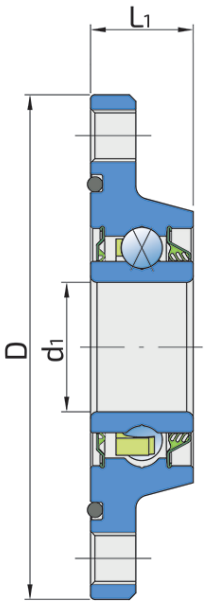




Technical Specification

J	Pitch circle diameter	98	mm
D	Outside diameter	117	mm
H/T	Hole/Thread	4xM12x1.25	mm
d1	Bore diameter	30	mm
L1	Total flange length	23.8	mm
kg	Mass	0.91	kg
Cdyn	Dynamic load rating	29.6	kN
Co	Static load rating	21	kN
Pu	Fatigue load limit	0.88	kN

Sealing

S SEAL / T SEAL



S seal on the base side and 3-lip seal on the front side which is exposed to contaminants.
The 3-lip seal on the front side protects the bearing from contaminant penetration.