
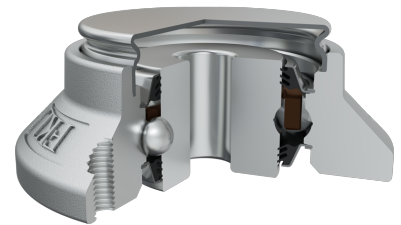


# The Bearing Solution For Seeding Machines, Integrated Flange

## IL20-70/6T-B12

The Bearing Solution For Seeding Machines, Integrated Flange  
Seeding Machine

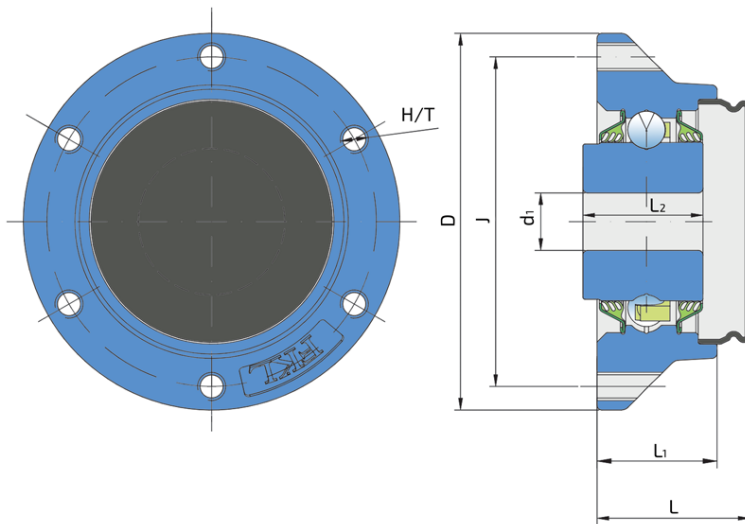

### Technical Specification

J	Pitch circle diameter	70 mm
D	Outside diameter	80 mm
H/T	Hole/Thread	6xM6 mm
d1	Bore diameter	12.2 mm
L	Total length	32.5 mm
L1	Total flange length	25.5 mm
L2	Bearing width	25.5 mm
kg	Mass	0.59 kg
Cdyn	Dynamic load rating	22 kN
Co	Static load rating	15.2 kN
Pu	Fatigue load limit	0.638 kN

## Sealing

---

### T SEAL / T SEAL+METAL PROTECTIVE CAP

3-lip seal on the both side with Metal protective cap on the front side.

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

