
# **Y-Ball Bearings With Standard Inner Ring**

# 1726205 2RS1

Y-Ball Bearings With Standard Inner Ring



FKLO

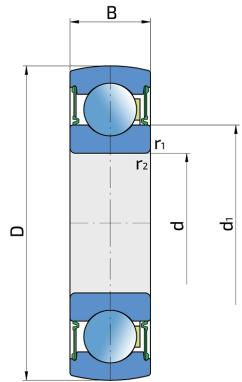

### **Technical Specification**


d	Bore diameter	25 mm
D	Outside diameter	52 mm
В	Width inner ring	15 mm
d1	Outer diameter inner ring	33.6 mm
r1,2	Inner ring Chamfer dimension	1 mm
Cdyn	Dynamic load rating	14 kN
Со	Static load rating	7.8 kN
Pu	Fatigue load limit	0.34 kN
kg	Mass	0.11 kg



### Sealing

#### RS SEAL / RS SEAL (2RS)

The older type of the single seal. Prevents penetration of soil, dust and water and since exposed to the impact of abrasive particles is expendable more than some new types of seals. Due to extended friction, the permitted speeds are lower. It was gradually replaced with the improved versions of S. Because of the traditional reasons Y bearings with this kind of seal do not have the additional sealing mark. It is used with the Y-bearings and deep groove ball bearings.



FKLO