
Y-Ball Bearings With Standard Inner Ring

1726209 2RS1

Y-Ball Bearings With Standard Inner Ring



FKLO

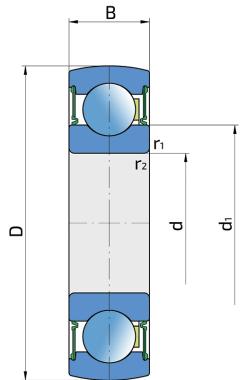


Technical Specification

D Outside	diameter	0E 100 100
D Outside		85 mm
B Width i	ner ring	19 mm
	ameter inner ring	56.6 mm
r1,2 Inner ri	g Chamfer dimension	1.1 mm
	c load rating	32.5 kN
	ad rating	20.4 kN
	load limit	0.92 kN
kg Mass		0.37 kg

Sealing

RS SEAL / RS SEAL (2RS)

The older type of the single seal. Prevents penetration of soil, dust and water and since exposed to the impact of abrasive particles is expendable more than some new types of seals. Due to extended friction, the permitted speeds are lower. It was gradually replaced with the improved versions of S. Because of the traditional reasons Y bearings with this kind of seal do not have the additional sealing mark. It is used with the Y-bearings and deep groove ball bearings.



FKLO