
The Bearing Solution For Seeding Machines, Integrated Flange


IL20-73/6H-B16

The Bearing Solution For Seeding Machines, Integrated Flange

Seed drill



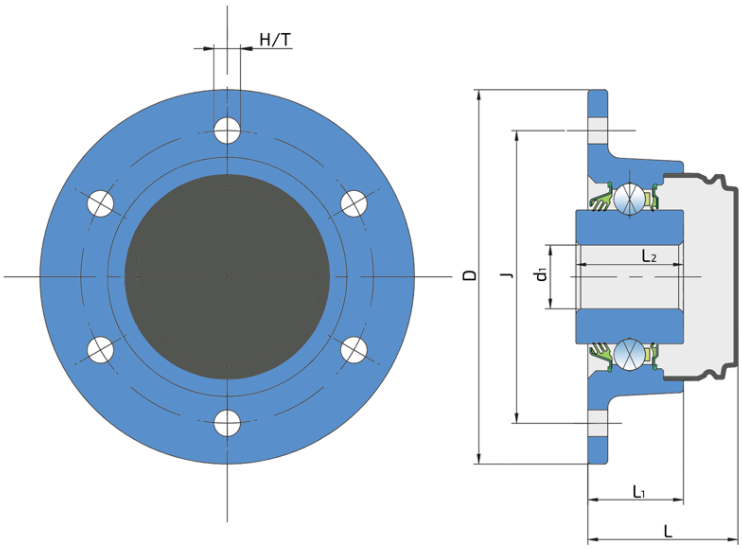

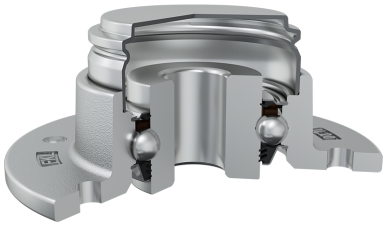


Technical Specification

J	Pitch circle diameter	73.5	mm
D	Outside diameter	94	mm
H/T	Hole/Thread	6x6.4	mm
d1	Bore diameter	16	mm
L	Total length	37.7	mm
L1	Total flange length	24	mm
L2	Bearing width	27	mm
kg	Mass	0.75	kg
Cdyn	Dynamic load rating	22	kN
Co	Static load rating	15.2	kN
Pu	Fatigue load limit	0.638	kN

Sealing

T SEAL / S SEAL+METAL PROTECTIVE CAP



3-lip seal on the base side and the S seal with Metal protective cap on the front side.
3-lip seal on the base side also protected with attached disc, protecting the bearing from contamination.
S seal with a Metal protective cap on the front side eliminates bearing contaminants.