


The Bearing Solution For Seeding Machines, Integrated Flange

IL20-75/5H-M16-L

The Bearing Solution For Seeding Machines, Integrated Flange Seeding Machine



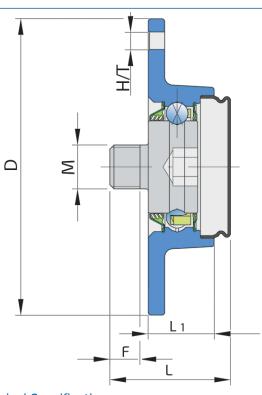



Technical Specification

| J | Pitch circle diameter | 75 mm |
|------|-------------------------|-----------------|
| D | Outside diameter | 94 mm |
| H/T | Hole/Thread | 5x6.7 mm |
| М | Outher Thread | M16x1.5-left mm |
| L | Total length | 51.7 mm |
| L1 | Total flange length | 24 mm |
| F | Length of threaded part | 14 mm |
| kg | Mass | 0.53 kg |
| Cdyn | Dynamic load rating | 22 kN |
| Со | Static load rating | 15.2 kN |
| Pu | Fatigue load limit | 0.64 kN |



Sealing

T SEAL / S SEAL+METAL PROTECTIVE CAP

3-lip seal on the base side and the S seal with Metal protective cap on the front side. 3-lip seal on the base side also protected with attached disc, protecting the bearing from contamination.

S seal with a Metal protective cap on the front side eliminates bearing contaminants.

