
Round Bore Series With Spherical Outer Ring - Non-Relubricable Type

W 208PPB4

Round Bore Series With Spherical Outer Ring - Non-Relubricable Type





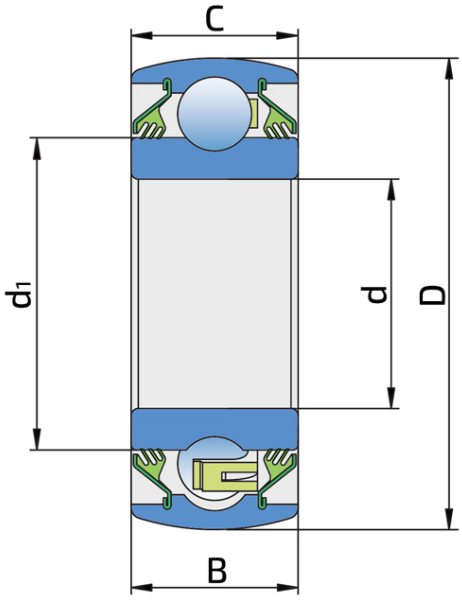

Technical Specification

d	Bore diameter	1.1878	inch
d	Bore diameter	30.17	mm
D	Outside diameter	3.1496	inch
D	Outside diameter	80	mm
B	Width inner ring	1.188	inch
B	Width inner ring	30.18	mm
C	Width outer ring	1.188	inch
C	Width outer ring	30.18	mm
d1	Outer diameter inner ring	2.047	inch
d1	Outer diameter inner ring	52	mm
Cdyn	Dynamic load rating	32.5	kN
Co	Static load rating	19.8	kN
kg	Mass	0.73	kg
Pu	Fatigue load limit	0.832	kN

Sealing

T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

