
<u>Round Bore Series With Spherical Outer Ring -</u> <u>Non-Relubricable Type</u>

W 208PPB4

Round Bore Series With Spherical Outer Ring - Non-Relubricable Type



FKLO

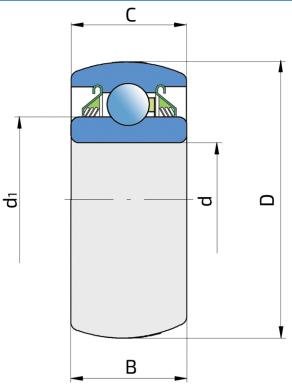



Technical Specification

d	Bore diameter	1.1878 inch
d	Bore diameter	30.17 mm
D	Outside diameter	3.1496 inch
D	Outside diameter	80 mm
В	Width inner ring	1.188 inch
В	Width inner ring	30.18 mm
С	Width outer ring	1.188 inch
С	Width outer ring	30.18 mm
dl	Outer diameter inner ring	2.047 inch
dl	Outer diameter inner ring	52 mm
Cdyn	Dynamic load rating	32.5 kN
Со	Static load rating	19.8 kN
kg	Mass	0.73 kg
Pu	Fatigue load limit	0.832 kN

Sealing

T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on

the both side.

