
<u>Round Bore Series With Spherical Outer Ring -</u> <u>Non-Relubricable Type</u>

W 208PPB7

Round Bore Series With Spherical Outer Ring - Non-Relubricable Type



FKLO

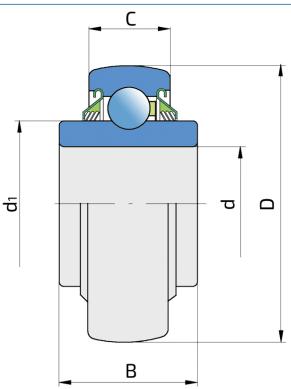



Co Pu	Static load rating Fatigue load limit	19.8 kN 0.832 kN
Cdyn	Dynamic load rating	32.5 kN
kg	Mass	0.64 kg
dl	Outer diameter inner ring	52 mm
dl	Outer diameter inner ring	2.047 inch
С	Width outer ring	18 mm
С	Width outer ring	0.709 inch
В	Width inner ring	30.18 mm
В	Width inner ring	1.188 inch
D	Outside diameter	80 mm
D	Outside diameter	3.1496 inch
d	Bore diameter	30.17 mm
d	Bore diameter	1.1877 inch



Sealing

T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on

the both side.

