


Round Bore Series With Spherical Outer Ring - Non-Relubricable Type

W 209PPB2

Round Bore Series With Spherical Outer Ring - Non-Relubricable Type

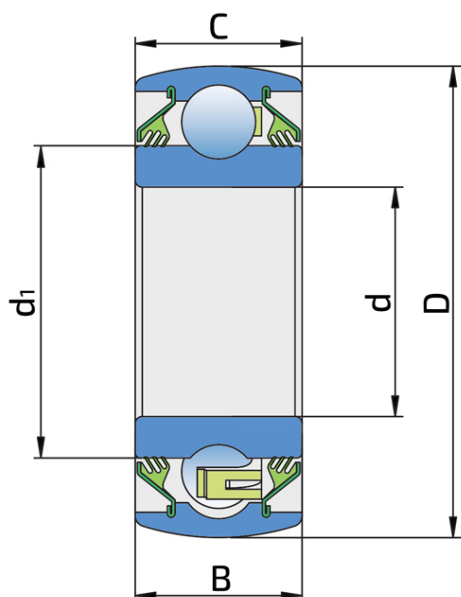

Technical Specification

d	Bore diameter	1.7717 inch
d	Bore diameter	45 mm
D	Outside diameter	3.3465 inch
D	Outside diameter	85 mm
B	Width inner ring	1.188 inch
B	Width inner ring	30.18 mm
C	Width outer ring	1.188 inch
C	Width outer ring	30.18 mm
d1	Outer diameter inner ring	2.228 inch
d1	Outer diameter inner ring	56.6 mm
kg	Mass	0.65 kg
C _{dyn}	Dynamic load rating	32.5 kN
C _o	Static load rating	20.4 kN
P _u	Fatigue load limit	0.857 kN

Sealing

T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

