
Round Bore Series With Spherical Outer Ring - Non-Relubricable Type

W 209PPB4

Round Bore Series With Spherical Outer Ring - Non-Relubricable Type





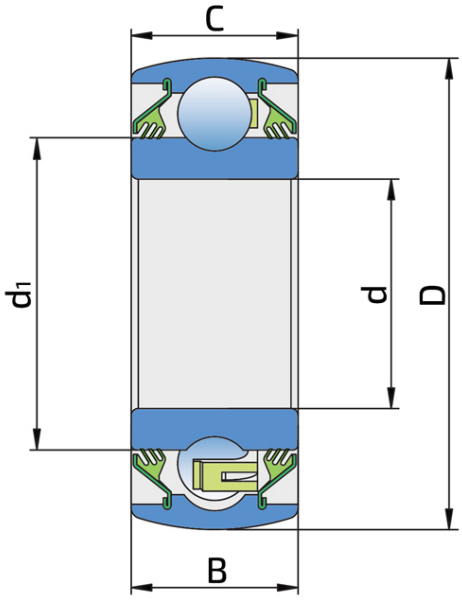

Technical Specification

d	Bore diameter	1.5354	inch
d	Bore diameter	39	mm
D	Outside diameter	3.3465	inch
D	Outside diameter	85	mm
B	Width inner ring	1.188	inch
B	Width inner ring	30.18	mm
C	Width outer ring	1.188	inch
C	Width outer ring	30.18	mm
d1	Outer diameter inner ring	2.228	inch
d1	Outer diameter inner ring	56.6	mm
kg	Mass	0.75	kg
Cdyn	Dynamic load rating	32.5	kN
Co	Static load rating	20.4	kN
Pu	Fatigue load limit	0.857	kN

Sealing

T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

