
Round Bore Series With Spherical Outer Ring - Non-Relubricable Type

W 210PPB2

Round Bore Series With Spherical Outer Ring - Non-Relubricable Type





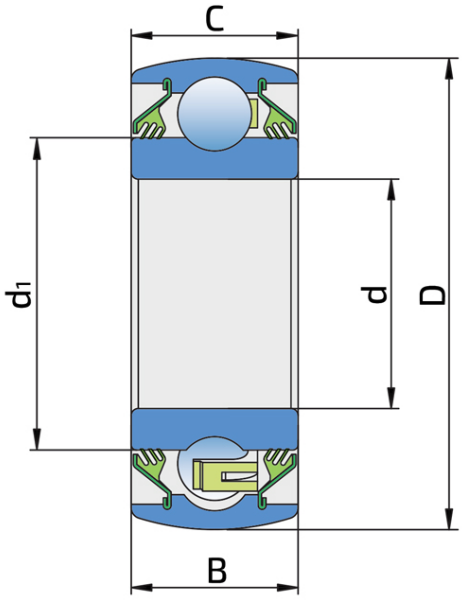

Technical Specification

d	Bore diameter	1.9382	inch
d	Bore diameter	49.23	mm
D	Outside diameter	3.5433	inch
D	Outside diameter	90	mm
B	Width inner ring	1.188	inch
B	Width inner ring	30.18	mm
C	Width outer ring	1.188	inch
C	Width outer ring	30.18	mm
d1	Outer diameter inner ring	2.461	inch
d1	Outer diameter inner ring	62.5	mm
kg	Mass	0.71	kg
Cdyn	Dynamic load rating	35	kN
Co	Static load rating	23.2	kN
Pu	Fatigue load limit	0.974	kN

Sealing

T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

