
Round Bore Series With Spherical Outer Ring - Non-Relubricable Type

W 211PPB2

Round Bore Series With Spherical Outer Ring - Non-Relubricable Type





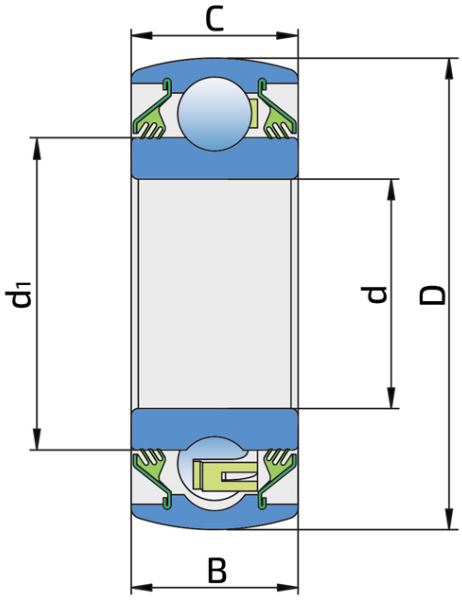

Technical Specification

d	Bore diameter	2.1882	inch
d	Bore diameter	55.58	mm
D	Outside diameter	3.937	inch
D	Outside diameter	100	mm
B	Width inner ring	1.313	inch
B	Width inner ring	33.34	mm
C	Width outer ring	1.313	inch
C	Width outer ring	33.34	mm
d1	Outer diameter inner ring	2.721	inch
d1	Outer diameter inner ring	69.1	mm
kg	Mass	0.97	kg
Cdyn	Dynamic load rating	43.5	kN
Co	Static load rating	29	kN
Pu	Fatigue load limit	1.218	kN

Sealing

T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

