
# <u>Square Bore Series With Spherical Outer Ring -</u> <u>Non-Relubricable Type</u>

## W 208PPB6

Square Bore Series With Spherical Outer Ring - Non-Relubricable Type



FKLO

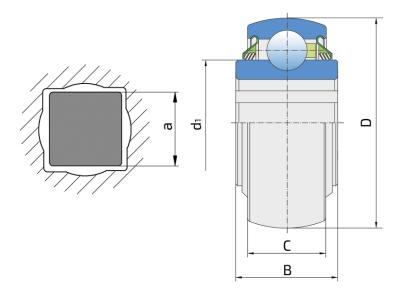



### **Technical Specification**

D	Outside diameter	3.1496 inch
D	Outside diameter	80 mm
В	Width inner ring	1.438 inch
В	Width inner ring	36.5 mm
С	Width outer ring	0.709 inch
С	Width outer ring	18 mm
d1	Outer diameter inner ring	2.047 inch
dl	Outer diameter inner ring	52 mm
а	Shaft size	0.9843 inch
a	Shaft size	25 mm
kg	Mass	0.72 kg
Cdyn	Dynamic load rating	32.5 kN
Со	Static load rating	19.8 kN
Pu	Fatigue load limit	0.832 kN

### Sealing

#### T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on

the both side.



