
# <u>Square Bore Series With Spherical Outer Ring -</u> <u>Non-Relubricable Type</u>

## W 209PPB30

Square Bore Series With Spherical Outer Ring - Non-Relubricable Type



FKLO

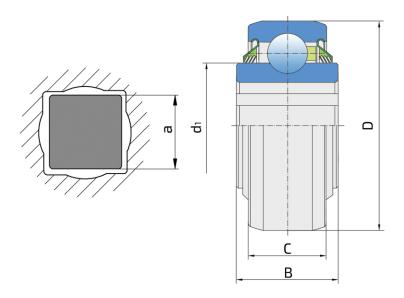



### **Technical Specification**

D	Outside diameter	3.5433 inch
D	Outside diameter	90 mm
В	Width inner ring	1.772 inch
В	Width inner ring	45 mm
С	Width outer ring	1.142 inch
С	Width outer ring	29 mm
d1	Outer diameter inner ring	2.228 inch
d1	Outer diameter inner ring	56.6 mm
a	Shaft size	1.1811 inch
a	Shaft size	30 mm
Cdyn	Dynamic load rating	32.5 kN
Со	Static load rating	20.4 kN
kg	Mass	1.14 kg

### Sealing

#### T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on

the both side.



