

Round Bore Series With Cylindrical Outer Ring – Relubricable Type

GW 210PP3

Round Bore Series With Cylindrical Outer Ring – Relubricable Type





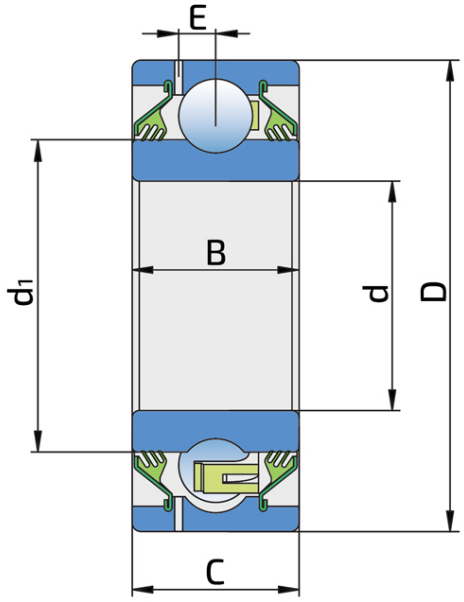

Technical Specification

d	Bore diameter	1.4067	inch
d	Bore diameter	35.73	mm
D	Outside diameter	3.543	inch
D	Outside diameter	90	mm
B	Width inner ring	1.188	inch
B	Width inner ring	30.18	mm
C	Width outer ring	1.188	inch
C	Width outer ring	30.18	mm
d1	Outer diameter inner ring	2.461	inch
d1	Outer diameter inner ring	62.5	mm
E	Distance from raceway centre to the hole for lubrication	0.26	inch
E	Distance from raceway centre to the hole for lubrication	6.6	mm
Cdyn	Dynamic load rating	35	kN
Co	Static load rating	23.2	kN
kg	Mass	1.02	kg

Sealing

T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

