


# Round Bore Series With Cylindrical Outer Ring - Relubricable Type

## GW 210PP9

Round Bore Series With Cylindrical Outer Ring - Relubricable Type

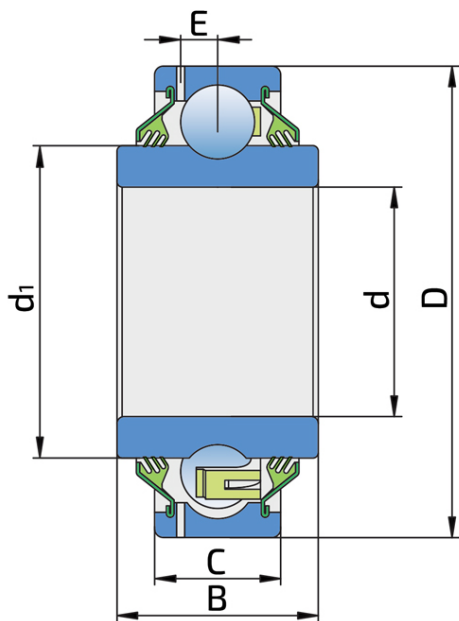

### Technical Specification

d	Bore diameter	1.9449 inch
d	Bore diameter	49.4 mm
D	Outside diameter	3.543 inch
D	Outside diameter	90 mm
B	Width inner ring	1.438 inch
B	Width inner ring	36.53 mm
C	Width outer ring	0.906 inch
C	Width outer ring	23 mm
d1	Outer diameter inner ring	2.461 inch
d1	Outer diameter inner ring	62.5 mm
E	Distance from raceway centre to the hole for lubrication	0.26 inch
E	Distance from raceway centre to the hole for lubrication	6.6 mm
C <sub>dyn</sub>	Dynamic load rating	35 kN
C <sub>o</sub>	Static load rating	23.2 kN
kg	Mass	0.79 kg

## Sealing

---

### T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

